
Ultra-durability that sticks! Innovative multi-purpose material


💆 bBa Sheets & Films

For purposes of safety, aesthetic beauty, and 5S workplace organization (sort, set in order, shine standardize and sustain)

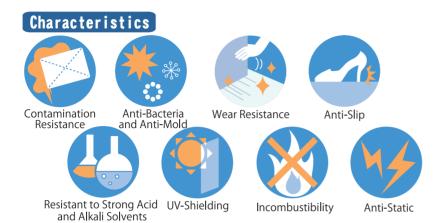

Product Structure

Special structure with ultra-durable coating on the surface



Wear-resistant, incombustible, and resistant to chemicals!

bBa Super Line Tape

Resistant to stains and does not leave a mark after removal Good to use for zoning and indicating routes in factories



Product Number	Thickness (µm)	Size	Color (Gloss type)
LTS50	306±5	50mm×20m	Yellow/Blue/Red/Green/Orange/ Yellow-Black Stripes/Black/ Gray/Brown/White (glossy)
LTL100	306±5	100mm×20m	Yellow-Black Stripes/Yellow /White/Orange (glossy)

Easy to stick and hard to peel off!Contamination Resistance!

bBa POP Laminate

Wear resistance, the antibacterial and antifungal effect keeps the beauty. Keep your original POP clean for a long time.

RoHs10 acquisition






Product Thickness Number (µm)		Size	Color (Gloss type)	
POP100	257±5	250mm×337mm	Clear (glossy)	

Protects AGV magnetic tapes and prevents skid-marks of tires!

bBa AGV Line Protection Tape

Good to prevent stains and damages of AGV magnetic tapes in warehouses and factories.






Even less slippage, as well as enhanced safety and durability

bBa Walking Zone Film

Chemical resistance provides reassurance and safety! Non-slip type Suitable as a protective sheet for walkways in places such as warehouses and factories where enhanced durability and safety are required.

(RoHs10 acquisition)







The Matrix coating process (airless) is used for the adhesive.Application is easy due to it being airless.



▲Application Example

Product Number	Thickness (µm)	Size	area	Color (Gloss type)
188 N S M	337±5	1000mm×30m	30m ²	Green/Blue/Gray /Green&White (non-slip)

An extensive option of designs! Choose from among 10 kinds!

bBa Design Sheet

Good for signposting in factories, warehouses, and hospitals.



Production with original designs is available.























® H-1	FORKL I FT Caut i on	TRAFFIC

_	CHECK LEFT
9 K-1	AND RIGHT


① L-1	EMAERGENCY EXIT GUIDANCE
· - ·	EXIT GOIDAINGE


No.	Product Number	Product Name	Size	
1	A-2	DO NOT ENTER	H250mm×W300mm	
2	B-1	SHOES STRICTLY PROHIBITED	H250mm×W300mm	
3	C-1	FIRE PROHIBITED	H250mm×W300mm	
4	D-1	STOP	H250mm×W300mm	
(5)	E-2	STOP!	H300mm×W250mm	
6	F-2	CAUTION OVERHEAD HAZARD	H300mm×W250mm	
7	G-2	WATCH YOUR STEP	H250mm×W300mm	
8	H-1	FORKLIFT TRAFFIC CAUTION	H250mm×W300mm	
9	K-1	CHECK LEFT AND RIGHT	H250mm×W300mm	
10	L-1	EMAERGENCY EXIT GUIDANCE	H250mm×W300mm	


For various locations such as factories, warehouses, and hospitals

bBa Marking Tape

A product made by modifying the bBa Super Line Tape for marking purposes













Product Name	Quantity	Size	Color (Gloss type)
Arrow Tape	10 sheets (10 pieces)	300mm×90mm	White/Yellow/Blue /Red/Green/Orange
Corner Tape	5 sheets (10 pieces)	150mm×150mm	
Positioning Tape	10 sheets (20pieces)	110mm×110mm	*The colors shown here are for your reference. Actual product colors may slightly vary.


Lights up during emergencies! A tape with high luminescence and long afterglow

bBa Luminous Tape

A phosphorescent tape that lights up in dark places, at night and during blackout.

This product works great as a guidance indicator during emergencies.





Product Number	Thickness (µm)	Size	Dimension	Color (Gloss type)
BT2510	460±5	25mm×10m	0.25㎡	
BT255	460±5	25mm×5m	0.125m²	Greenish Yellow
BT251	460±5	25mm×1m	0.025㎡	(glossy) *Turquoise
BT5010	460±5	50mm×10m	0.5m²	emission
BT505	460±5	50mm×5m	0.25m²	in the dark
BT501	460±5	50mm×1m	0.05m ²	

(Phosphorescent luminescence statistics)

bBa Luminous Tape has higher luminescence and longer afterglow than any conventional product, and greatly exceeds the JC values in afterglow duration.

Elapsed Time	2 min	10min	20min	30min	60min	Thickness (mm)
bBa Luminous Tape	1027	286.2	149.6	88.9	37.1	0.46
JIS JC standards	880	210	100	62	30	

(Measurement distance: 350 mm, measurement angle: 3 degrees, unit: mcd/m²)

Manufacturer



Takahara Corporation

Headquarters

81, Awarakamoike, Kiyosushi, Aichi 452-0901 Japan TEL:+81-52-325-7725 FAX:+81-52-325-7726

Tokyo Office

1F Koshin Bldg., 1-11-2, Uchikanda, Chiyoda-ku, Tokyo 101-0047 Japan TEL:+81-35-283-5266 FAX:+81-35-283-5269

https://www.takahara-corp.jp

Takahara Corporation Search



Vendor

^{*}The measurement method of luminescence conforms to JISZ9107.

^{*}All data shown here are not applicable to products in use.