

Temperature Controlling box & Cooling Top

Temperature Controlling Box: To control hot and cold temperature for fresh food, lighter delivery, and safe transportation


EPP box is the best solution!

Cooling Top: Addition accessory for cool pack setting to increase efficiency of temperature control for long term and stable storing.



- ✓ Excellent Insulation from -40°C to 120°C
- ✓ Product made by EPP
- ✓ Safe for food contact
- ✓ Best cushioning material
- ✓ Returnable usage
- ✓ Environmentally friendly
- ✓ Clean and wash available
- ✓ Durable & Light weight
- ✓ 100% Recyclable

Temperature Controlling box

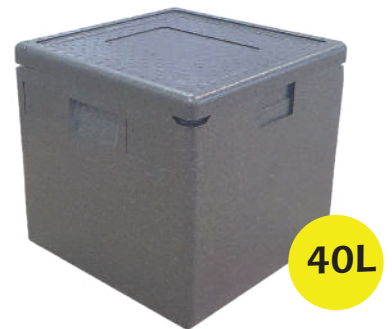

Spec / Model	23L	29L	40L
Outside Dimension	400 x 600 x 190 mm	330 x 390 x 385 mm	410 x 410 x 390 mm
Stores Dimension	337 x 538 x 125 mm	270 x 330 x 325 mm	350 x 350 x 330 mm
Container Weight	1.3 kg	1.1 kg	1.38 kg
Maximum Loading	23 kg	29 kg	40 kg
Internal Capacity	23 Liter	29 Liter	40 Liter
Color/ Material	Black/ Kaneka EPP Material		

Temperature Controlling box & Cooling Top



50L




80L

Spec / Model	50L	80L
Outside Dimension	400 x 600 x 338 mm	485 x 685 x 360 mm
Stores Dimension	337 x 538 x 275 mm	425 x 625 x 295 mm
Container Weight	1.64 kg	2.27 kg
Maximum Loading	50 kg	80 kg
Internal Capacity	50 Liter	80 Liter
Color/ Material	Black/ Kaneka EPP Material	

Cooling Top



11083

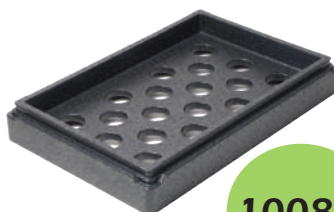

10083



12683

Spec / Model	11083 GN 1/2	10083 GN 1/2	12683 GN 1/2
Outside Dimension	330 x 390 x 83 mm	400 x 600 x 83 mm	485x 685 x 83 mm
Container Weight	160 g	350 g	450 g
Use for	29L (11063)	50L (10053)	50L (10053)
Color/ Material	Black/ Kaneka EPP Material		

kaneka
The Dreamology Company
— Make your dreams come true —

KANEKA (THAILAND) CO.,LTD
388 Exchange Tower, 21st Floor, Unit 2101-1 Sukhumvit Rd, Klongtoey sub-district,
Klongtoey district, Bangkok Thailand 10110
Tel : +66(0)-2035-5149 Fax : +66(0)-2035-5148

TPD
THAI THERMO DYNAMICS CO.,LTD.

THAI THERMO DYNAMICS CO.,LTD.
35/28 Yingruenivet Soi 3 Moo 8 Bangtalad, Pakkred, Nontaburi Thailand 11120
Mobile : +66(0)8-1733-2117
Tel : +66(0)2-574-4565 Fax : +66(0)2-984-4668